


HITACHI
Inspire the Next



HITACHI
AMORPHOUS TRANSFORMERS





Overhead Type



Item		SiT	AMT
Dimension (mm)	Φ	435(100)	435(100)
	H	830(100)	890(107)
Mass (kg)		258(100)	310(120)

1P 50kVA 6kV/210V 60Hz

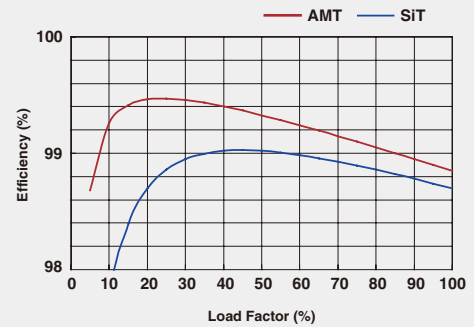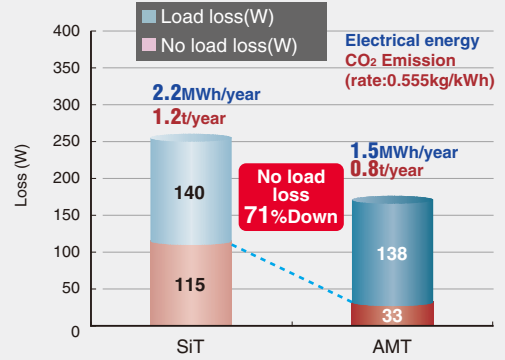

Item	SiT	AMT
100 % Loaded Loss (W)	No-Load Loss	115(100) / 33(29)
	Load Loss	558(100) / 558(100)
	Total Loss	673(100) / 591(88)
50% Loaded Total Loss (W)	255(100)	173(68)
Total Owning Cost (# 1)	100	89

Characteristic Table

Overhead Type

Phase	Core Type	Voltage (V)	Frequency (Hz)	Capacity (kVA)	No Load Loss (W)	Load Loss (W)	5% Loaded Total Loss (W)
1P	Amorphous Steel	6.6kV/210	50Hz	50	32	470	149.5
	Silicoon Steel				85	470	202.5
1P	Amorphous Steel		60Hz		33	558	172.5
	Silicoon Steel				115	558	254.5

SiT=Silicon Steel Core Transformer
 AMT=Amorphous Steel Core Transformer

Hitachi Industrial Equipment Systems Co., Ltd.

Head Office

AKS Building, 3, Kanda Neribeicho, Chiyoda-ku, Tokyo, 101-0022, Japan

TEL: +81-(0)3-4345-6000

<http://www.hitachi-ies.co.jp/english/>

USA

Hitachi America, Ltd.

Industrial Systems Division

50 Prospect Avenue, Tarrytown,

New York, 10591-4698

TEL: +1(914)332-5800

FAX: +1(914)332-5555

<http://www.hitachi-america.us/>

Europe

Hitachi Europe GmbH

Industrial Components & Equipment Group

Am Seestern 18 (Euro Center)

D-40547 Düsseldorf

P.O.BOX 11053, 40545 Düsseldorf

TEL: +49 (211) 5283 0

FAX: +49 (211) 5283 649

<http://www.hitachi-ds.com/en/>

China

Hitachi (China) Ltd.

(Shanghai Office)

(Hitachi (Shanghai) Trading Co., Ltd.)

18th Floor, Rui Jin Building No.205

Maoming Road (S) Shanghai, 200020

TEL:+86 (21) 6472-1002

FAX:+86 (21) 6472-4990

<http://www.hitachi.com.cn/micro/IEG/index.html>

Information in this brochure is subject to change without notice.

For further information, please contact your nearest sales representative.