

3 Series

UltraPortable LCD Projector

CP-X320W



1200 ANSI Lumens

- Native XGA Resolution
(1280 x 1024 compressed)
- 7 lbs.
- 2 RGB Inputs
- RGB Output
- Composite / S-video Inputs
- Manual Zoom / Manual Focus
- Digital Keystone Correction

HITACHI
Inspire the Next

CP-X320W Ultra-Portable LCD Projector

| | |
|--------------|-----------------|
| Model | CP-X320W |
|--------------|-----------------|

Performance Specifications

| | |
|--------------------------------|---|
| Liquid crystal panel structure | 0.9" polysilicon active-matrix TFT x 3 |
| Number of Pixels | 786,432 pixels (V768 x H1024) |
| Resolution | 1024 x 768 color pixels |
| Lens | Manual zoom 1:1.2 (F1.7 - 2.0) |
| Lamp | 160W UHB |
| Brightness | 1, 200 ANSI lumens |
| Contrast ratio | 300 : 1 |
| Speakers | 1W X 2 Stereo |
| Power supply | AC90-132V / AC220-240V 50 / 60HZ |
| Power consumption | 250W |
| Operating temperature | 0° - 35° C (32° - 95° F) |
| Input signals | VGA, S-VGA, XGA, SXGA (COMPRESSED), MAC13", MAC16", NTSC, NTSC 4.43, PAL, M-PAL, N-PAL, PAL60, SECAM, S-Video |
| Noise level | 37 dB |

Input / Output Terminals


| | | |
|------------------------------|-----------|--------------------------------------|
| RGB input signal terminals | RGB | D - sub 15 - pin shrink terminal x 2 |
| | AUDIO | Mini jack x 2 |
| RGB output signal terminals | RGB | D - sub 15 - pin shrink terminal x 1 |
| | AUDIO | Mini jack x 1 |
| Video signal input terminals | S-VIDEO | Mini - Din 4 pin terminal x 1 |
| | COMPOSITE | RCA jack x 1 |
| Control terminals | | D - sub 15 - pin shrink terminal x 1 |

Dimensions

| | |
|---------------|----------------------|
| (W x H x D) | 11.7" x 3.0" x 8.98" |
| Weight | 7 lbs. |

Supplied Accessories

Remote control with Laser Pointer, PS/2 mouse cable, Batteries, Power cord (U.S., UK, Euro), Video cable, RGB cable, Multiple language operator's manual, Handle strip and Carry case

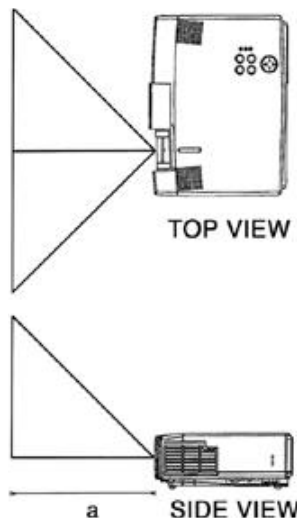

a: Distance from the LCD projector to the screen.
The projection distance shown in the table below are for full size (1024 X 768 dots)

Table 1. Installation Reference

| Screen size (inches) | a (inches) | |
|----------------------|------------|-----|
| | Min. | Max |
| 40 | 65 | 78 |
| 60 | 98 | 117 |
| 80 | 131 | 157 |
| 100 | 163 | 196 |
| 120 | 196 | 236 |
| 150 | 246 | 295 |
| 200 | 328 | 394 |

HITACHI

Hitachi America, Ltd. Computer Division

2000 Sierra Point Parkway, MS:760
Brisbane, CA 94005-1835
Tel (800) 225-1741
Fax (650) 244-7776

Web Site: <http://www.hitachi.com/lcd>
For information on other Hitachi products:
1-800-HITACHI (800-448-2244)

Hitachi Canada, Ltd.

6740 Campobello Road
Mississauga, Ontario L5N 2L8
Tel (905) 821-4545
(800) 906-4482
Fax (905) 814-0848
Web Site: <http://www.hitachi.ca>

Specifications and product offerings are subject to change without notice ©2001 Hitachi America, Ltd. All rights reserved. Printed in US DS.CP-X320W.08.01